



Pinconnection on FlightPower-Hacker EVO 20 Pack Balancer-Lead Steckerbelegung des Balancer-Anschluß am FlightPower-Hacker EVO 20 Pack

2S-Packs

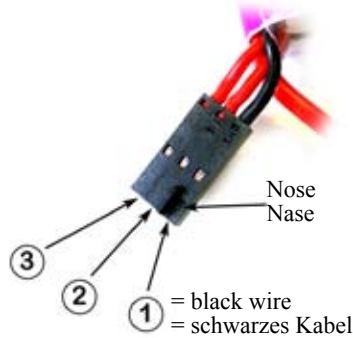

Pin	2S-Pack	V (nom.)	Cell
1	final neg -	0	Cell#1 neg -
2		3,7	Cell#1 pos + / Cell#2 neg -
3	final pos +	7,4	Cell#2 pos +

3S-Packs

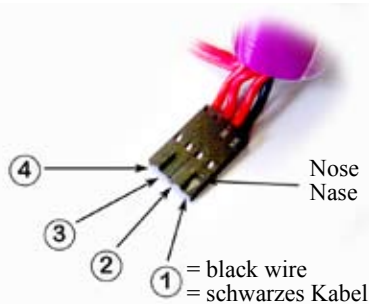

Pin	3S-Pack	V (nom.)	Cell
1	final neg -	0	Cell#1 neg -
2		3,7	Cell#1 pos + / Cell#2 neg -
3		7,4	Cell#2 pos + / Cell#3 neg -
4	final pos +	11,1	Cell#3 pos +

4S-Packs

Pin	Wire-Color	4S-Pack	V (nom.)	Cell
1	Black / Schwarz	final neg -	0	Cell#1 neg -
2	White / Weiß		3,7	Cell#1 pos +
3	Grey / Grau		3,7	Cell#2 neg -
4	Purple / Lila		7,4	Cell#2 pos +
5	Blue / Blau		7,4	Cell#3 neg -
6	Green / Grün		11,1	Cell#3 pos +
7	Yellow / Gelb		11,1	Cell#4 neg -
8	Orange / Orange	final pos +	14,8	Cell#4 pos +
9	Red / Rot		unused	unused
10	Brown / Braun		unused	unused

5S-Packs

Pin	Wire-Color	5S-Pack	V (nom.)	Cell
1	Black / Schwarz	final neg -	0	Cell#1 neg -
2	White / Weiß		3,7	Cell#1 pos +
3	Grey / Grau		3,7	Cell#2 neg -
4	Purple / Lila		7,4	Cell#2 pos +
5	Blue / Blau		7,4	Cell#3 neg -
6	Green / Grün		11,1	Cell#3 pos +
7	Yellow / Gelb		11,1	Cell#4 neg -
8	Orange / Orange		14,8	Cell#4 pos +
9	Red / Rot		14,8	Cell#5 neg -
10	Brown / Braun	final pos +	18,5	Cell#5 pos +

